

# Drainage device

for control panels & enclosures, IP66 / IP69K



IP66

IP69K

RoHS  
compliant

REACH  
COMPLIANCE


Made in  
Germany

## Specificaties

|                             |                          |
|-----------------------------|--------------------------|
| IP-classificatie (EN 60529) | IP66, IP69K              |
| Temperatuur                 | -45 C° tot 70 C°         |
| Montage type                | Bevestiging met borgmoer |

## Producttypes en maten

Drainage device M50

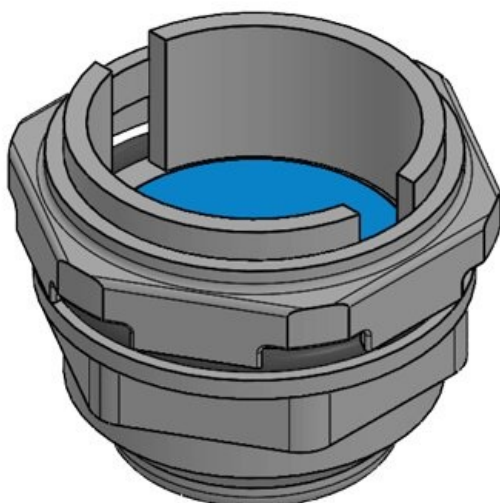

 WE  
CONTROL  
COMPONENTS

**Bestel direct online @ CC Nederland »**

 **Voor aanvragen uit België [klik hier](#) »**

In enclosures and housings with a high degree of protection, temperature differences result in condensation. By using a drainage device, it is possible to safely drain off the condensate without losing a maximum enclosure protection of IP66. A water-permeable membrane ensures the drainage of the enclosure due to its capillary effect. The design prevents splash water from entering the interior of the enclosure.

The drainage device is fixed in the bottom of the enclosure using the union nut in a hole of Ø 50.5 +0.5 mm. Make sure that the sealing ring is on the outer housing wall and that the hole is free of burrs.

## Voordelen

- High protection class IP66 / IP69K
- Good drainage performance
- Easy assembly
- Based on a standard cut-out
- Sturdy, weatherproof and UV-resistant housing

|                   |                   |                 |                  |
|-------------------|-------------------|-----------------|------------------|
| Art.nr.           | <b>99193</b>      | Inbouwmaat      | <b>50,5 mm</b>   |
| EAN               | <b>4251269324</b> | rond            |                  |
|                   | <b>789</b>        | Schroefdraad    | <b>M50 × 1,5</b> |
| Aantal            | <b>1</b>          | Water           | <b>200 ml/h</b>  |
| Lengte            | <b>49,5 mm</b>    | permeability (5 |                  |
| Breedte           | <b>60 mm</b>      | mm water        |                  |
| Hoogte            | <b>60 mm</b>      | column)         |                  |
| Montage<br>hoogte | <b>28,5 mm</b>    |                 |                  |

